


## MG-5170 DC

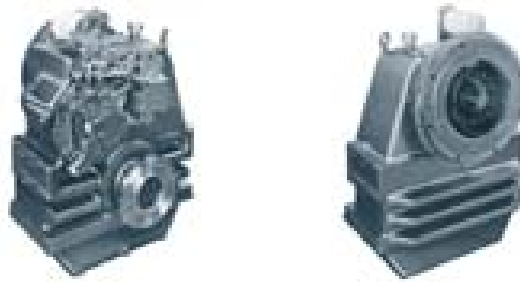

### STANDARD EQUIPMENT

- Input coupling 14"/18" Torsional type with torsional stop standard
- Oil pressure gauge
- Oil strainer and oil filter
- RPM pickup ports
- SAE housings no. 1 and 0

### OPTIONS

- Companion flange
- Electric, 12V or 24V selector valve
- Mounting brackets
- Oil temperature gauge
- PTOs - Run engine direction and engine speed
  - Live SAE C 592 N•m (437 lb-ft)
  - Live SAE C-C 1186 N•m (875 lb-ft)
  - With hydraulic disconnect clutch SAE C 592 N•m (437 lb-ft)
  - With hydraulic disconnect clutch SAE C-C 1186 N•m (875 lb-ft)
- Raw/fresh water heat exchangers
- Remote mounted filter
- Trolling valve